

[illegible]

16	Joint	Brass	継手	C3604B	1
15	Sensing Pipe	Copper	検出管	C1220	1
14	Sensing Pipe Joint	Brass	検出管継手	C3604B	2
13	Elbow	Brass	エルボー	C3771BE	1
12	Tee	Brass	ティー	C3771BE	1
11	Pipe C	Copper	導管C	C1220T	1
10	Pipe B	Copper	導管B	C1220T	1
9	Pipe A	Copper	導管A	C1220T	1
8	Elbow	Brass	エルボー 1/4	C3771BE	1
7	Nipple	Carbon Steel	ニップル 1/4	S25C	2
6	Elbow	Carbon Steel	エルボー 1/4	S25C	1
5	Socket	Carbon Steel	ソケット 1/8×1/4	S25C	1
4	Nipple	Carbon Steel	ニップル 1/8	S25C	1
3	Pilot Valve O-B-2000P	Bronze	子弁 O-B-2000P	CAC406	1
2	Pilot Valve G-P-2000BP	Ductile Cast Iron	子弁 G-P-2000BP	FCD450	1
1	Main Valve GPM-2000	Ductile Cast Iron	親弁 GPM-2000	FCD450	1
No	Name of Parts	Material	部 品 名	材 質	Q.TV


(mm)						
Size	d	L	H ₁	H	A	Weight(kg)
15A	Rc 1/2	150	170	398	200	16.3
20A	Rc 3/4	150	170	398	200	16.3
25A	Rc 1	160	175	404	226	20.6
32A	Rc 1 1/4	180	192	434	226	23.8
40A	Rc 1 1/2	180	192	434	226	23.8
50A	Rc 2	230	216	498	276	35.3

Specification	
Fluid	
Inlet Press.	MPa
Reduced Press.	MPa
Set Temp.	°C
Temp.Regulation Range	°C
Flow Rate	

TYPE CP-2005 COMBINATION VALVE
コンビネーションバルブ

Approval	Y. AOYAMA
Check	T. WATANABE
Drawing	M. MURATA
Drawing No.	Y-788-2201
Date	19 APR 2000








16	Joint	Brass	継手	C3604B	1
15	Sensing Pipe	Copper	検出管	C1220	1
14	Sensing Pipe Joint	Brass	検出管継手	C3604B	2
13	Elbow	Brass	エルボー	C3771BE	1
12	Tee	Brass	ティー	C3771BE	1
11	Pipe C	Copper	導管C	C1220T	1
10	Pipe B	Copper	導管B	C1220T	1
9	Pipe A	Copper	導管A	C1220T	1
8	Elbow	Brass	エルボー 1/4	C3771BE	1
7	Nipple	Carbon Steel	ニップル 1/4	S25C	2
6	Elbow	Carbon Steel	エルボー 1/4	S25C	1
5	Socket	Carbon Steel	ソケット 1/8×1/4	S25C	1
4	Nipple	Carbon Steel	ニップル 1/8	S25C	1
3	Pilot Valve O B-2000P	Brass	子弁 O B-2000P	CAC406	1
2	Pilot Valve G P-2000BP	Ductile Cast Iron	子弁 G P-2000BP	FCD450	1
1	Main Valve GPM-2000	Ductile Cast Iron	親弁 GPM-2000	FCD450	1
No.	Name of Parts	Material	部品名	材質	QTY

Specification	
Fluid	
Inlet Press.	MPa
Reduced Press.	MPa
Set Temp.	°C
Temp.Regulation Range	°C
Flow Rate	

TYPE CP-2005 COMBINATION VALVE
コンビネーションバルブ

Approval	Y. AOYAMA
Check	T. WATANABE
Drawing	M. MURATA
Drawing No.	Y-788-2205
Date	19 APR 2000

Yoshitake
INC.
<http://www.yoshitake.co.jp>

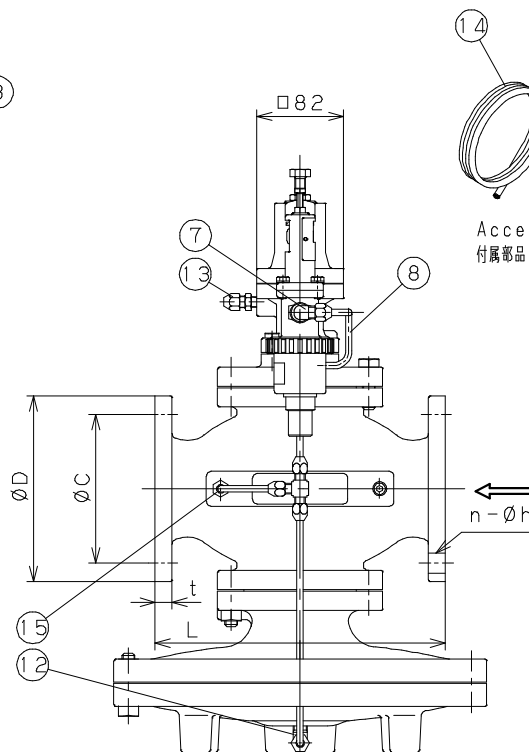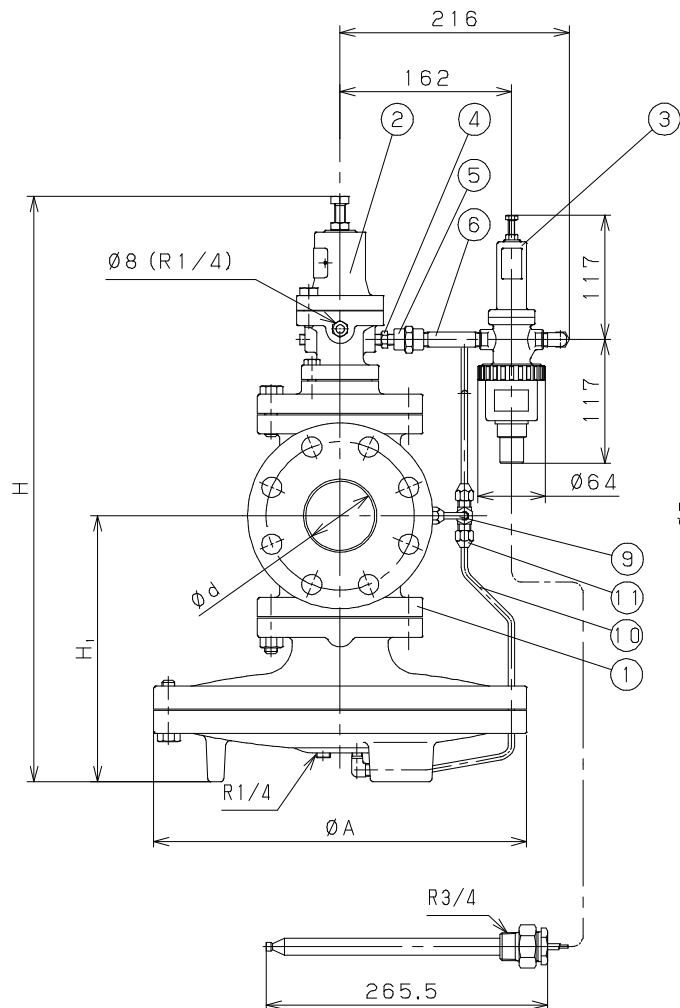

15	Joint	Brass	継手	C3604B	1
14	Sensing Pipe	Copper	検出管	C1220	1
13	Sensing Pipe Joint	Brass	検出管継手	C3604B	2
12	Elbow	Brass	エルボー	C3771BE	1
11	Tee	Brass	ティー	C3771BE	1
10	Pipe C	Copper	導管C	C1220T	1
9	Pipe B	Copper	導管B	C1220T	1
8	Pipe A	Copper	導管A	C1220T	1
7	Elbow	Brass	エルボー 1/4	C3771BE	1
6	Long Nipple	Carbon Steel	ロングニッ플 1/4	STPG	1
5	Socket	Carbon Steel	ソケット 1/8×1/4	S25C	1
4	Nipple	Carbon Steel	ニッ플 1/8	S25C	1
3	Pibt Valve 0B-2000P	Bronze	子弁 0B-2000P	CAC406	1
2	Pibt Valve GP-2000BP	Ductile Cast Iron	子弁 GP-2000BP	FCD450	1
1	Main Valve GPM-2000	Ductile Cast Iron	親弁 GPM-2000	FCD450	1
No	Name of Parts	Material	部 品 名	材 質	Q.T.Y

Size	L	H ₁	H	A	(mm)					Weight(kg)
					Flange		JIS 10K		FF	
					d	D	C	t	n-h	
65A	278	251	552	352	65	175	140	18	4-19	66.1
80A	294	264	575	352	80	185	150	18	8-19	71.2
100A	330	321	658	401	100	210	175	18	8-19	109.3

Specification	
Fluid	
Inlet Press.	MPa
Reduced Press.	MPa
Set Temp.	°C
Temp.Regulation Range	°C
Flow Rate	

TYPE CP-2005 CONBINATION VALVE
コンビネーションバルブ

Approval	Y. AOYAMA
Check	T. WATANABE
Drawing	M. MURATA
Drawing No.	Y-788-2205
Date	20 APR 2000

Yoshitake
INC.
<https://www.yoshitake.co.jp>